

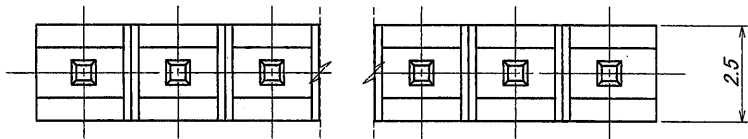


A B C D E F G H

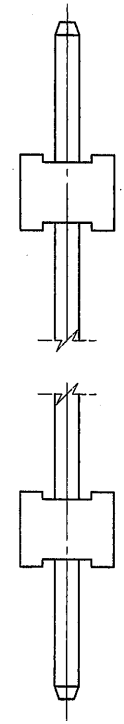


極数 CKT	弊社品番 PARTS No.	A	B
4	6027B-04Z095-PT1	7.5	10.0
24	6027B-24Z095-PT1	57.5	60.0

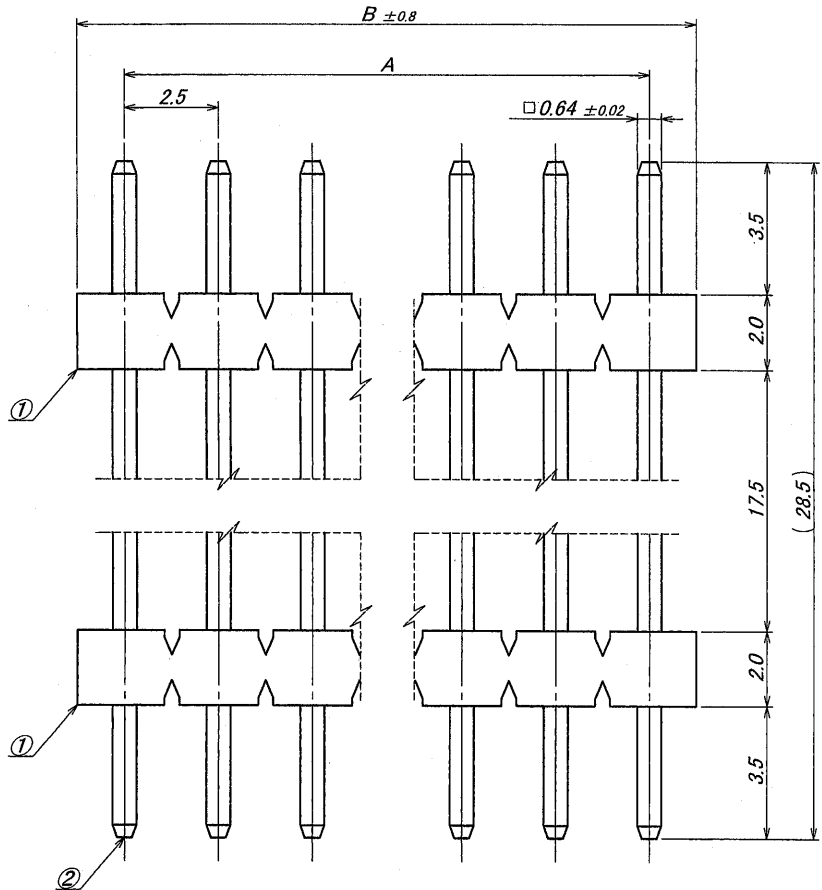

仕様
 1. 最大定格電圧電流 : 250V, 3A (AC, DC)
 2. 使用温度範囲 : -40~+105°C

NOTE
 1. MAXIMUM RATING VOLTAGE AND CURRENT : 250V, 3A (AC, DC)
 2. TEMPERATURE RANGE : -40~+105°C



△						MATERIAL 材質 ①ベース : PBT樹脂, GF15%, UL94V-0, 黒色 BASE : PBT, GF15%, UL94V-0, COLOR: BLACK ②端子/PIN : 黄銅/BRASS	GENERAL TOLERANCES 一般公差 DIM 寸法 ± 0.3 ANGLE 角度 ±	SCALE 尺度 / DR '08-9-18 S. Sasak CHK '08-9-22 M. Takagi	UNIT 単位 mm DSN '92-1-31 Sakamak APP '08-9-22	TITLE 名称 6027シリーズ ピンヘッダー SERIES 6027 PIN HEADER
△						FINISH 仕上げ 前めっき/PRE-PLATE ニッケル下地めっき/OVER NICKEL PLATE 1.0 μmMIN. 錫リフローめっき/TIN REFLOW PLATE 2.0 μmMIN.	3RD. ANG. PROJ. 三角法 ①	IRISO ELECTRONICS CO., LTD IRISO 電子工業株式会社		PARTS No 部番 6027B-**Z095-PT1
△	ECN No	REVISION RECORD 記	DR	CHK	DATE 年月日					DWG No 図番 IRISA-6027B-**Z095-PT1
△	32104	Released	S.K	M.T	9/18/08					REV. 0

REVISION COPY