極数 CKT	部品番号 PARTS No.	A	B	極数 CKT	部品番号 PARTS No.	A	B
3	6029B-1-03Z186-PT1	4.0	6.0	17	6029B-1-17Z186-PT1	32.0	34.0
4	6029B-1-04Z186-PT1	6.0	8.0	18	6029B-1-18Z186-PT1	34.0	36.0
5	6029B-1-05Z186-PT1	8.0	10.0	19	6029B-1-19Z186-PT1	36.0	38.0
6	6029B-1-06Z186-PT1	10.0	12.0	20	6029B-1-20Z186-PT1	38.0	40.0
7	6029B-1-07Z186-PT1	12.0	14.0	21	6029B-1-21Z186-PT1	40.0	42.0
8	6029B-1-08Z186-PT1	14.0	16.0	22	6029B-1-22Z186-PT1	42.0	44.0
9	6029B-1-09Z186-PT1	16.0	18.0	23	6029B-1-23Z186-PT1	44.0	46.0
10	6029B-1-10Z186-PT1	18.0	20.0	24	6029B-1-24Z186-PT1	46.0	48.0
11	6029B-1-11Z186-PT1	20.0	22.0	25	6029B-1-25Z186-PT1	48.0	50.0
12	6029B-1-12Z186-PT1	22.0	24.0	26	6029B-1-26Z186-PT1	50.0	52.0
13	6029B-1-13Z186-PT1	24.0	26.0	27	6029B-1-27Z186-PT1	52.0	54.0
14	6029B-1-14Z186-PT1	26.0	28.0	28	6029B-1-28Z186-PT1	54.0	56.0
15	6029B-1-15Z186-PT1	28.0	30.0	29	6029B-1-29Z186-PT1	56.0	58.0
16	6029B-1-16Z186-PT1	30.0	32.0	30	6029B-1-30Z186-PT1	58.0	60.0

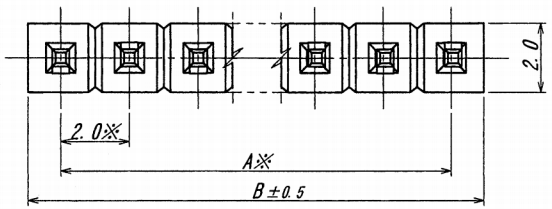

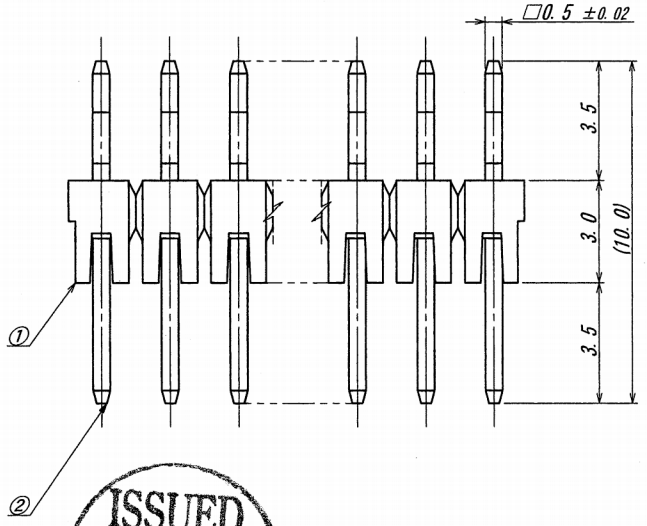

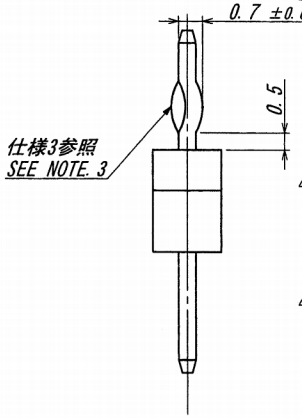

仕様
1. 最大定格電圧電流　：250V, 3A (AC, DC)
2. 使用温度範囲　：-40～+105℃
3. キンク　：向きはお互い逆向きとし、ベースの向きに対して固定しないこと。
△2 4.当該品はウィスカーの発生を通常品よりも抑制する効果を持たせた製品で有りますが、ウィスカーの発生を無くす事を保証する製品では有りません。
5.本製品は錆の発生を通常品よりも抑制する効果を持たせた製品でありますが、錆の発生を無くす事を保証する製品ではありません。
△3 6. キンク方向は下図のどちらでも可とする
7. 推奨基板　：板厚 t=1.2～1.6mm
穴径 φ0.8 +0.1/-0 (3～15極), φ0.85 +0.1/-0 (16～30極)
※根元管理とする

NOTE
1. MAXIMUM RATING VOLTAGE AND CURRENT : 250V, 3A (AC, DC)
2. TEMPERATURE RANGE : -40～+105℃
3. FORMING:ALTERNATING KINK DIRECTIONS STARTING WITH FACING EITHER UP OR DOWN.
△2 4. APPLICABLE PRODUCT HAS EFFECT TO SUPPRESS THE OCCURRENCE OF WHISKER THAN NORMAL.
HOWEVER, IT IS NOT A PRODUCT THAT GUARANTEES THAT THERE IS NO OCCURRENCE OF WHISKER.
5. APPLICABLE PRODUCT HAS EFFECT TO SUPPRESS THE OCCURRENCE OF RUST THAN NORMAL. HOWEVER, IT IS NOT A PRODUCT THAT GUARANTEES THAT THERE IS NO OCCURRENCE OF RUST.
6. KINK DIRECTION NO PROBLEM ON EITHER SIDES WHICH IS SHOWN NOTE6.
△3 7. RECOMMENDED HOLE SIZE AND THICKNESS OF P.C.B :
φ0.8 +0.1/-0 (3～15P), φ0.85 +0.1/-0 (16～30P)
t=1.2～1.6mm THICK
※MANAGED AT THE BOTTOM

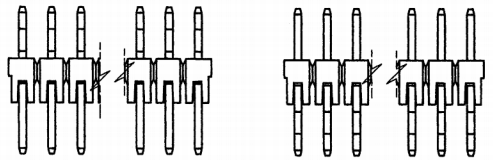

NOTE6

ISSUED '15.1.20 IRISO ENG. DEPT.

LTR 記号	ECN No	REVISION RECORD 記事	DR	CHK	DATE 年月日
△5	49071	NOTE REV	M.T	Jma	'15-1-19
△4	48074	NOTE REV	Y.H	M.T	'14-7-2
△1	46109	REVISED	T.T	T.U	'14-1-22
△0	45664	RELEASED	H.Y	K.K	'13-12-19

MATERIAL 材質
①ベース：ガラス入りPA66, UL94V-0, 自然色 (アイボリー)
BASE:GLASS FILLED PA66, UL94V-0, COLOR:NATURAL (IVORY)
②端子/ピン：黄銅/BRASS

FINISH 仕上げ
②前めっき/PRE-PLATE
ニッケル下地めっき/OVER NICKEL PLATE 1μmMIN.
錫リフローめっき/TIN REFLOW PLATE 2μmMIN.

GENERAL TOLERANCES 一般公差
DIM 寸法 ± 0.3
ANGLE 角度 ±

3RD. ANG. PROJ. 三角法

SCALE 尺度
UNIT 単位 mm
DR '15-1-19 M.Tajima
DSN '92-1-21 Suzuki
CHK 1/19'15 Jma
APP 1/19 M.Takagi

IRISO ELECTRONICS CO., LTD
イリソ電子工業株式会社

TITLE 名称
6029シリーズ ピンヘッダー
SERIES 6029 PIN HEADER
EDP No
PARTS No 部番
IMSA-6029B-1-**Z186-PT1
DWG No 図番
110-206029-003
REV. 3

DO NOT SCALE DRAWING.
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO IRISO AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. 本図面は、イリソ電子工業（株）の所有する情報を含むもので当社の許可なく複製を禁止する。
REDUSED COPY