

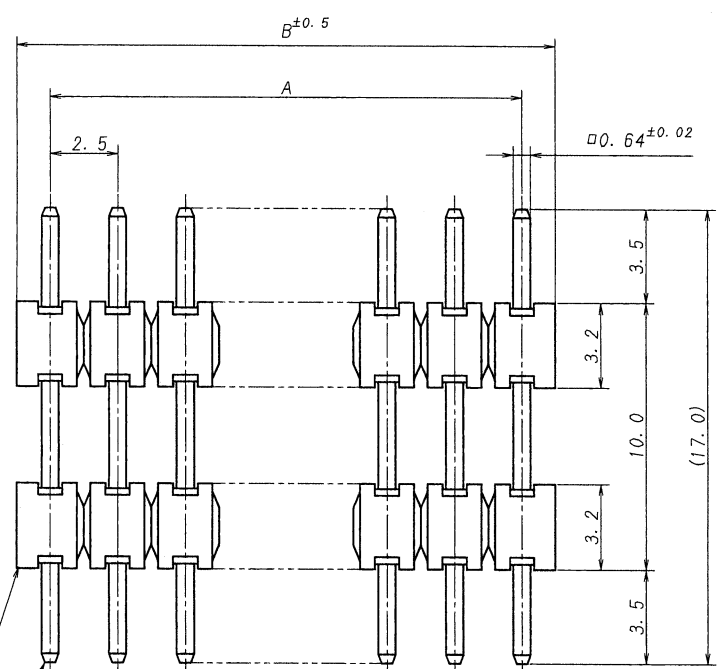


A B C D E F G H

極数	部品番号	A	B
CKT	PARTS No.		
3	6065B-03Z011-PT1	5.0	7.5
4	6065B-04Z011-PT1	7.5	10.0
7	6065B-07Z011-PT1	15.0	17.5

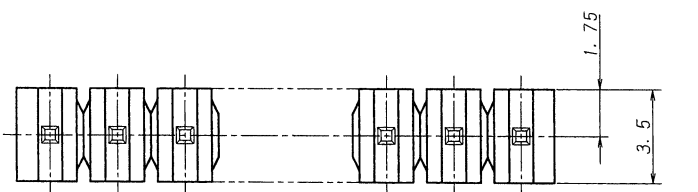


仕様

- 1. 最大定格電圧電流 : 250V, 3A (AC, DC)
- 2. 使用温度範囲 : -40~+105℃

NOTE

- 1. MAXIMUM RATING VOLTAGE AND CURRENT : 250V, 3A (AC, DC)
- 2. TEMPERATURE RANGE : -40℃ TO +105℃



<p>△ △ △ △ △ △ △</p>				<p>MATERIAL 材質</p> <p>① ベース: ガラス入り46ナイロン樹脂, UL94V-0, GF30% 自然色 (アイボリー)</p> <p>BASE: GLASS FILLED 46NYLON, UL94V-0 GF30%, COLOR: NATURAL (IVORY)</p> <p>② 端子/PIN: 黄銅/BRASS</p>		<p>GENERAL TOLERANCES 一般公差</p> <p>DIM 寸法 ± 0.3</p> <p>ANGLE 角度 ±</p>		<p>SCALE 尺度</p> <p>DR 12-3-30</p> <p>CHK YL</p> <p>3/30 M. Takagi</p>		<p>UNIT 単位 mm</p> <p>DSN 12-3-30</p> <p>APP 2012-3-30</p>		<p>TITLE 名称 6065シリーズ ピンヘッダー</p> <p>SERIES 6065 PIN HEADER</p>	
<p>FINISH 仕上げ</p> <p>前めっき/PRE-PLATE ニッケル下地めっき/OVER NICKEL PLATE 1.0μmMIN</p> <p>スズリフローめっき/TIN REFLOW PLATE 2.0μmMIN</p>				<p>3RD. ANG. PROJ. 三角法</p>		<p>J. Nakayama J. Nakayama</p> <p>4. Sawaki</p>		<p>EDP No</p> <p>PARTS No 部番 6065B-**-Z011-PT1</p>		<p>DWG No 図番 IMSA-6065B-**-Z011-PT1</p>		<p>REV. 0</p>	
<p>41304 RELEASED</p>		<p>T.N. M.T.</p>		<p>12-3-30</p>		<p>IRISO 電子工業株式会社</p>		<p>DO NOT SCALE DRAWING. THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO IRISO AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.</p>					