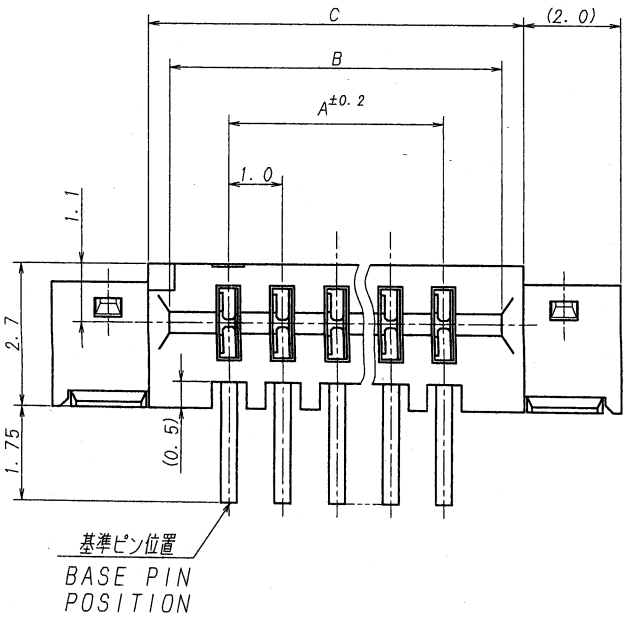

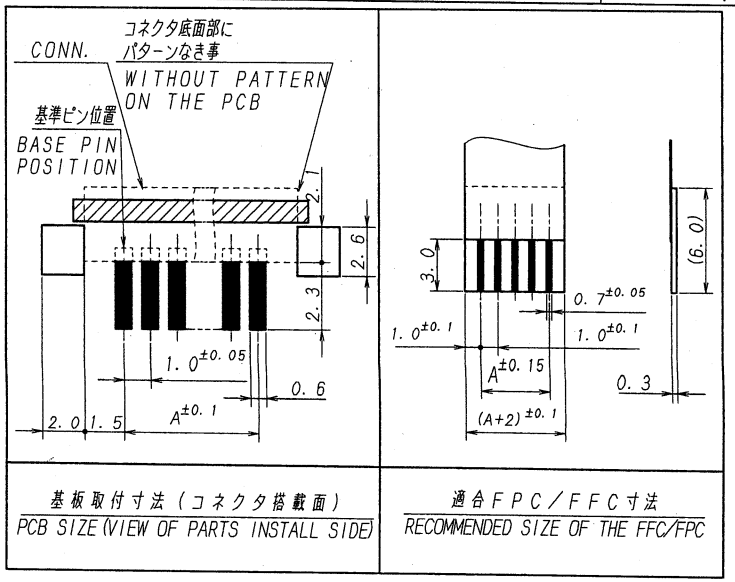

極数 CKT	部品番号 PARTS No.	A	B	C
4	9611S-04C-TM1	3.0	5.2	6.0
5	-05C	4.0	6.2	7.0
6	-06C	5.0	7.2	8.0
7	-07C	6.0	8.2	9.0
8	-08C	7.0	9.2	10.0
9	-09C	8.0	10.2	11.0
10	-10C	9.0	11.2	12.0
11	-11C	10.0	12.2	13.0
12	-12C	11.0	13.2	14.0
13	-13C	12.0	14.2	15.0
14	-14C	13.0	15.2	16.0
15	-15C	14.0	16.2	17.0
16	-16C	15.0	17.2	18.0
17	-17C	16.0	18.2	19.0
18	-18C	17.0	19.2	20.0
19	-19C	18.0	20.2	21.0
20	-20C	19.0	21.2	22.0
21	-21C	20.0	22.2	23.0
22	-22C	21.0	23.2	24.0
23	-23C	22.0	24.2	25.0
24	-24C	23.0	25.2	26.0
25	-25C	24.0	26.2	27.0
26	-26C	25.0	27.2	28.0
27	-27C	26.0	28.2	29.0
28	-28C	27.0	29.2	30.0
29	-29C	28.0	30.2	31.0
30	9611S-30C-TM1	29.0	31.2	32.0

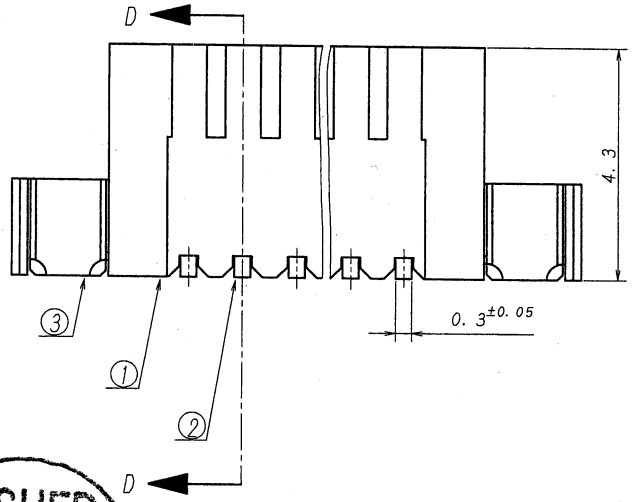

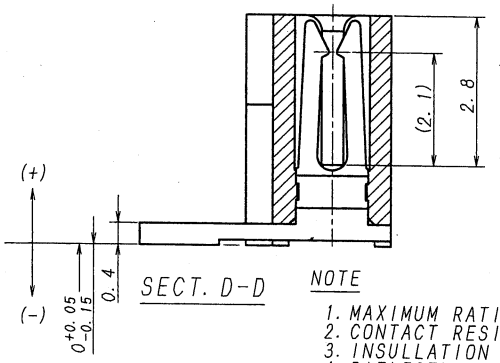

仕様

1. 最大定格電圧電流 ：50V, 0.5A (AC, DC)
2. 接触抵抗 ：20mΩ以下 (初期値にて)
3. 絶縁抵抗 ：500MΩ以上 (DC250Vにて)
4. 耐電圧 ：250V／1分間
5. 適合FPC／FFC ：t=0.3mm±0.05
   住友電工製スミカード
6. 当該品はFFC／FPCケーブルの嵌合時におけるウィスカーの発生を通常時よりも抑制する効果を持たせた製品でありますが、ウィスカーの発生を無くすことを保証する製品ではありません。
   FFC／FPCケーブルの嵌合時におけるウィスカー抑制効果をもたせる為に、FFC／FPCケーブルはウィスカーを抑制効果を有するタイプ、もしくは当該品とのウィスカー抑制効果が確認できるタイプを選定の上ご使用下さい。

NOTE

1. MAXIMUM RATING VOLTAGE AND CURRENT : 50V, 0.5A (AC, DC)
2. CONTACT RESISTANCE : 20mΩMAX.
3. INSULLATION RESISTANCE : 500MΩMIN. /DC250V
4. DIELECTRIC WITHSTANDING VOLTAGE : 250V/1MINUTE
5. THICKNESS OF THE FPC/FFC : $t=0.3^{\pm 0.05}$ mm
   SUMICARD BY SUMITOMO
6. APPLICABLE PRODUCT HAS EFFECT TO SUPPRESS THE OCCURRENCE OF WHISKER IN MATCHING OF FFC/FPC CABLE THAN NORMAL. HOWEVER, IT IS NOT A PRODUCT THAT GUARANTEES THAT THERE IS NO OCCURRENCE OF WHISKER.
   PLEASE USE FFC/FPC CABLE AFTER SELECTING THE FOLLOWING TYPES.
   THERE IS A WHISKER SUPPRESSIVE EFFECT OR THE WHISKER CONTROLLING EFFECT CAN BE CONFIRMED.

ISSUED 11.4.19 IRISO ENG. DEPT.

LTR 記号	ECN NO	REVISION RECORD 記事	DR	CHK	DATE 年月日
△	98334	RELEASED	Y.K	MT	'11-4-14

MATERIAL 材質
① ハウジング：ガラス入りPPS樹脂 黒色, UL94V-0
HOUSING:GLASS FILLED PPS UL94V-0 COLOR:BLACK
② 端 子/CONTACT：リン青銅/PHOSPHOR-BRONZE
③ 補強板/MOUNTING：黄銅/COPPER ALLOY

FINISH 仕上げ
② ニッケル下地めっき/OVER NICKEL PLATE:1~3μm
半光沢錫めっき/SEMIGROSS TIN PLATE 3~6μm
③ 錫リフローめっき/ TIN PLATE

GENERAL TOLERANCES 一般公差
DIM 寸法 ± 0.3
ANGLE 角度 ±

3RD. ANG. PROJ. 三角法

SCALE 尺度 /
UNIT 単位 mm
DR '11-4-14 Y. Kitagawa
DSN '03-11-25 E. Matsuoka
CHK Y1 4/5 M. Takaa
APP 4/5 Y. Yoshika

IRISO ELECTRONICS CO., LTD.
イリソ電子工業株式会社

TITLE 名称
9611シリーズFPC/FFC コネクタ (NON-ZIF, SMT TYPE, I型)
SERIES 9611 FPC/FFC CONN. (NON-ZIF, SMT TYPE, I)

EDP No

PARTS No 部番 9611S-**C-TM1

DWG No 図番 IMSA-9611S-**C-TM1 REV. 0

DO NOT SCALE DRAWING.
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO IRISO AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

REPRODUCED COPY