
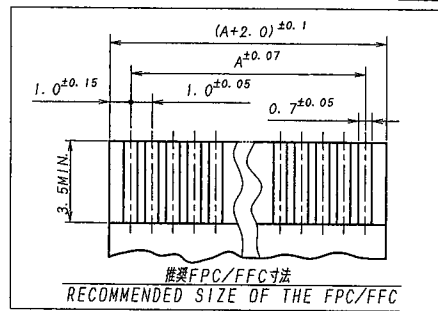


検数 CKT	部品番号 PARTS No.	A	B	C	NOTE
4	9615S-04D-PP-A	3.0	5.1	7.0	
5	-05D	4.0	6.1	8.0	
6	-06D	5.0	7.1	9.0	
7	-07D	6.0	8.1	10.0	
8	-08D	7.0	9.1	11.0	
9	-09D	8.0	10.1	12.0	
10	-10D	9.0	11.1	13.0	
11	-11D	10.0	12.1	14.0	
12	-12D	11.0	13.1	15.0	
13	-13D	12.0	14.1	16.0	
14	-14D	13.0	15.1	17.0	
15	-15D	14.0	16.1	18.0	
16	-16D	15.0	17.1	19.0	
17	-17D	16.0	18.1	20.0	
18	-18D	17.0	19.1	21.0	
19	-19D	18.0	20.1	22.0	
20	-20D	19.0	21.1	23.0	
21	-21D	20.0	22.1	24.0	
22	-22D	21.0	23.1	25.0	
23	-23D	22.0	24.1	26.0	
24	-24D	23.0	25.1	27.0	
25	-25D	24.0	26.1	28.0	
26	-26D	25.0	27.1	29.0	
27	-27D	26.0	28.1	30.0	
28	-28D	27.0	29.1	31.0	
29	-29D	28.0	30.1	32.0	
30	-30D	29.0	31.1	33.0	
40	9615S-40D-PP-A	39.0	41.1	43.0	

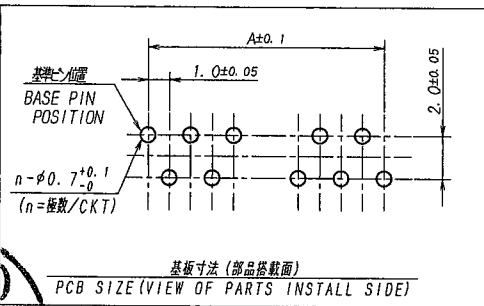

- 仕様
- 最大定格電圧電流 : 50V, 0.5A
 - 接触抵抗 : 20mΩ以下 (初期値にて)
 - 適合FPC/FFC厚さ : 0.3±0.05mm
 - 推奨基板厚 : 0.8~1.6mm

- NOTE
- MAXIMUM RATING VOLTAGE AND CURRENT : 50V, 0.5A
 - CONTACT RESISTANCE : 20mΩMAX.
 - THICKNESS OF THE FPC/FFC : 0.3±0.05mm
 - RECOMMENDED THICKNESS OF P.C.B. : 0.8~1.6mm THICK

ISSUED
1812-5
ARISO
EMC DEPT

MATERIAL 材質				GENERAL TOLERANCES 一般公差		SCALE 尺度		UNIT 単位		TITLE 名称	
①ハウジング : ガラス入りPBT樹脂 黒色 UL94V-0				DIM 寸法 ±0.3		DR 13-12-4		mm		9615シリーズ FPC/FFC コネクタ (1型/ボス無)	
① HOUSING : GLASS FILLED PBT UL94V-0 COLOR:BLACK				ANGLE 角度 ±		S. Nakayama E. Matsu		DSN '01-11-20		SERIES 9615 FPC/FFC CONN. (TYPE 1/WITHOUT BOSS)	
② 端子/PIN : リン青銅/PHOSPHOR-BRONZE						CHK 12/4 13 S. Ura 12/4 M. Takagi		APP Y3		EPD No	
FINISH 仕上げ				3RD. ANG. PROJ. 三角法		IRISO ELECTRONICS CO., LTD.				PARTS No 部番	
前めっき/PRE PLATED 錫めっき/ROE 処理/TIN REFLOW PLATE: 0.8~1.5um						IRISO 電子工業株式会社				IMSA-9615S-**D-PP-A	
LTR 記号				DATE 年月日		DWG No 図番				REV.	
ECN NO				DR		110-109615-001				REV.	
REVISION RECORD				CHK						REVISED COPY	