極数/CKT	部品番号/PARTS No.	A	B	C
6	9850S-06P-TMN1	5.0	6.9	8.5
8	9850S-08P-TMN1	7.0	8.9	10.5
10	9850S-10P-TMN1	9.0	10.9	12.5
12	9850S-12P-TMN1	11.0	12.9	14.5
14	9850S-14P-TMN1	13.0	14.9	16.5
16	9850S-16P-TMN1	15.0	16.9	18.5
18	9850S-18P-TMN1	17.0	18.9	20.5
20	9850S-20P-TMN1	19.0	20.9	22.5
22	9850S-22P-TMN1	21.0	22.9	24.5
24	9850S-24P-TMN1	23.0	24.9	26.5
26	9850S-26P-TMN1	25.0	26.9	28.5
28	9850S-28P-TMN1	27.0	28.9	30.5
30	9850S-30P-TMN1	29.0	30.9	32.5
32	9850S-32P-TMN1	31.0	32.9	34.5
40	9850S-40P-TMN1	39.0	40.9	42.5

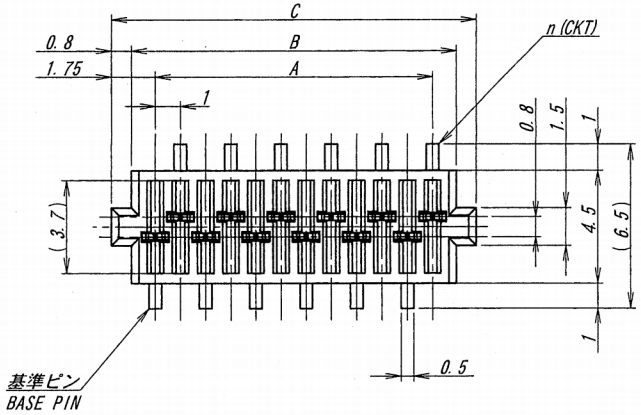

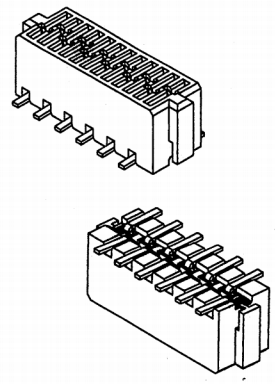

NOTE
1. ピッチ、嵌合方向可動量：±0.8mm
2. 列間方向可動量：±0.5mm
3. コプラナリティー：0.1MAX
4. 当該品はウィスカーの発生を通常品よりも抑制する効果を持たせた製品でありますが、ウィスカーの発生を無くす事を保証する製品ではありません。

NOTE
1. FLOATING VALUE OF PITCH, MATING : ±0.8mm
2. FLOATING VALUE OF LINE : ±0.5mm
3. COPLANARITY : 0.1MAX.
4. APPLICABLE PRODUCT HAS EFFECT TO SUPPRESS THE OCCURRENCE OF WHISKER THAN NORMAL. HOWEVER, IT IS NOT A PRODUCT THAT GUARANTEES THAT THERE IS NO OCCURRENCE OF WHISKER.

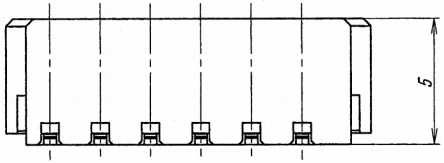

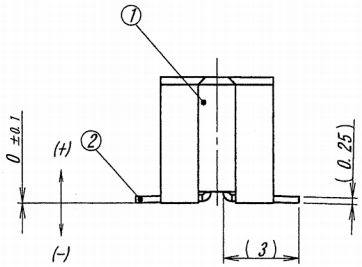

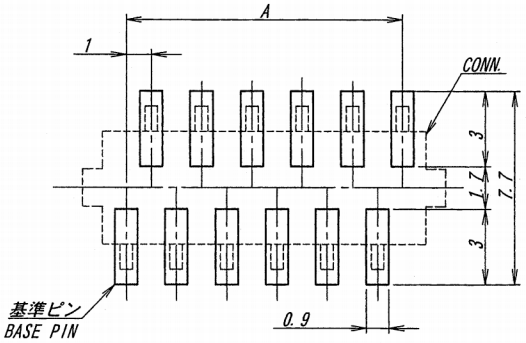

推奨基板寸法
一般公差：±0.05　基板厚：1.6mm
(マウント面)

RECOMMENDED PCB SIZE
GENERAL TOLERANCE : ±0.05
THICKNESS OF PCB : 1.6mm
(MOUNTING SIDE)

ISSUED '15.3.24 IRISO ENG. DEPT.

LTR 記号	ECN No	REVISION RECORD 記事	DR	CHK	DATE 年月日
0	49574	RELEASED	T.D	S.Ma	'15-3-23

MATERIAL 材質
①ハウジング：ガラス入り9Tナイロン樹脂 黒色 UL94V-0
②端子：リン青銅 (t=0.25)
①HOUSING : GLASS FILLED 9TNYLON BLACK UL94V-0
②CONTACT : PHOSPHOR BRONZE (t=0.25)

FINISH 仕上げ
ニッケル下地めっき/OVER Ni PLATE : 1μmMIN.
錫半光沢めっき/TIN MATT PLATE
接点部/CONTACT AREA : 3～6μm
テール部/TAIL AREA : 1μmMIN.

GENERAL TOLERANCES 一般公差
DIM 寸法 ± 0.3
ANGLE 角度 ±

3RD. ANG. PROJ. 三角法

SCALE 尺度 ／
UNIT 単位 mm
DR '15-3-23 T. Doi
DSN '15-3-23 T. Doi
CHK 3/23 '15 T. Ma
APP '15 3/23 M. Yoshida

IRISO ELECTRONICS CO., LTD
イリソ電子工業株式会社

TITLE 名称 9850シリーズ ソケット SERIES 9850 SOCKET
EDP No
PARTS No 部番 IMSA-9850S-**P-TMN1
DWG No 図番 110-409850-060
REV. 0

DO NOT SCALE DRAWING.
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO IRISO AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION　本図面は、イリソ電子工業（株）の所有する情報を含むもので当社の許可なく複製を禁止する。

REDUSED COPY