極数/CKT	部品番号/PARTS No.	A	B	C	D
6	9855S-06Z04-TMN1	5.0	6.9	8.5	5.9
8	9855S-08Z04-TMN1	7.0	8.9	10.5	7.9
10	9855S-10Z04-TMN1	9.0	10.9	12.5	9.9
12	9855S-12Z04-TMN1	11.0	12.9	14.5	11.9
14	9855S-14Z04-TMN1	13.0	14.9	16.5	13.9
16	9855S-16Z04-TMN1	15.0	16.9	18.5	15.9
18	9855S-18Z04-TMN1	17.0	18.9	20.5	17.9
20	9855S-20Z04-TMN1	19.0	20.9	22.5	19.9
22	9855S-22Z04-TMN1	21.0	22.9	24.5	21.9
24	9855S-24Z04-TMN1	23.0	24.9	26.5	23.9
26	9855S-26Z04-TMN1	25.0	26.9	28.5	25.9
28	9855S-28Z04-TMN1	27.0	28.9	30.5	27.9
30	9855S-30Z04-TMN1	29.0	30.9	32.5	29.9

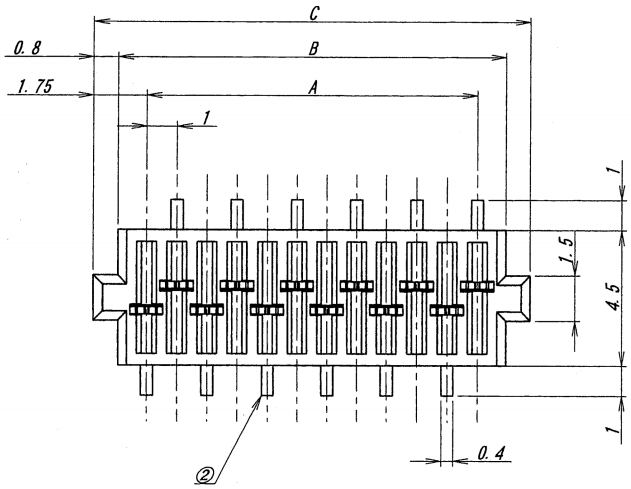





NOTE
1. 嵌合プラグ : 985*B-***-***
2. コプラナリティー : 0.1 MAX
3. 本製品はウィスカーの発生を通常品よりも抑制する効果を持たせた製品でありますが、ウィスカーの発生を無くすことを保証する製品ではありません。

NOTE
1. MATING OF PLUG : 985*B-***-***
2. COPLANARITY : 0.1 MAX.
3. THIS PRODUCT HAS EFFECT TO SUPPRESS THE OCCURRENCE OF WHISKER THAN NORMAL. HOWEVER, IT IS NOT A PRODUCT THAT GUARANTEES THAT THERE IS NO OCCURRENCE OF WHISKER.

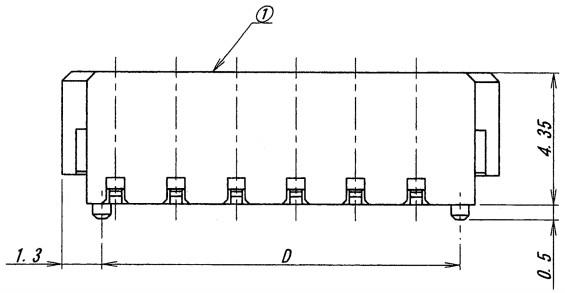

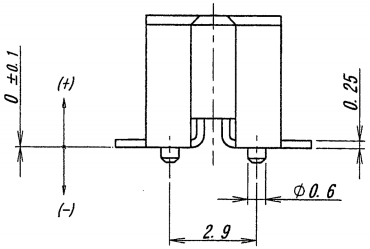

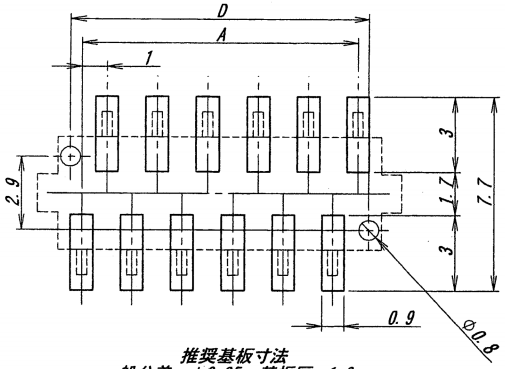

推奨基板寸法
一般公差 : ±0.05 基板厚 : 1.6mm
(マウント面)

RECOMMENDED PCB SIZE
GENERAL TOLERANCE : ±0.05
THICKNESS OF PCB : 1.6mm
(MOUNTING SIDE)

ISSUED
16.4.-4
IRISO
ENG.DEPT.

LTR 記号	ECN No	REVISION RECORD 記事	DR	CHK	DATE 年月日
0	51513	RELEASED	Y.K	M.T	'15-6-18

MATERIAL 材質
①ハウジング : ガラス入り9Tナイロン樹脂, 黒色, UL94V-0
HOUSING : GLASS FILLED 9TNYLON, BLACK, UL94V-0
②端 子 : リン青銅 (t=0.25)
CONTACT: PHOSPHOR BRONZE (t=0.25)

FINISH 仕上げ
ニッケル下地めっき/OVER Ni PLATE : 1μm MIN.
錫半光沢メッキ/TIN MATT PLATE
接点部/CONTACT AREA : 3~5μm
テール部/TAIL AREA : 1μm MIN.

GENERAL TOLERANCES 一般公差
DIM 寸法 ± 0.3
ANGLE 角度 ±

3RD. ANG. PROJ. 三角法

SCALE 尺度 —
UNIT 単位 mm
DR '15-6-18 Y. KOJIMA
DSN '00-4-20 H. Honma
CHK '15.6.18 M. Takaki
APP 6/18 '15 J. Ma

IRISO ELECTRONICS CO., LTD
イリソ電子工業株式会社

TITLE 名称
9855シリーズ ソケット
SERIES 9855 SOCKET

EDP No

PARTS No 部番
IMSA-9855S-**Z04-TMN1

DWG No 図番 110-409855-065
REV. 0

DO NOT SCALE DRAWING.
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO IRISO AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. 本図面は、イリソ電子工業（株）の所有する情報を含むもので当社の許可なく複製を禁止する

PRINTED COPY