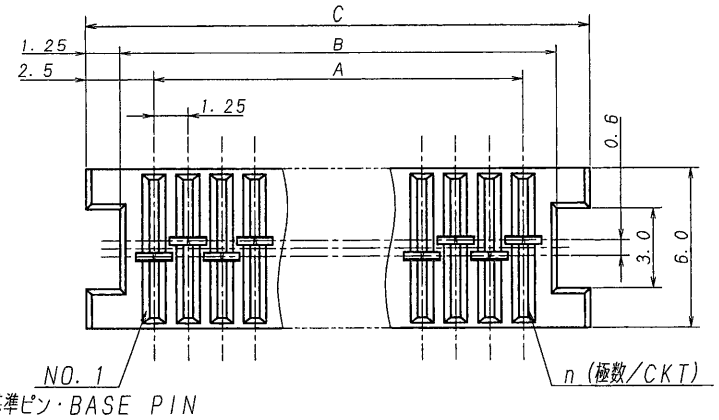

極数 CKT	部品番号 PARTS No.	A	B	C
6	9890S-06K-TR	6.25	8.75	11.25
8	-08	8.75	11.25	13.75
10	-10	11.25	13.75	16.25
12	-12	13.75	16.25	18.75
14	-14	16.25	18.75	21.25
16	-16	18.75	21.25	23.75
18	-18	21.25	23.75	26.25
20	-20	23.75	26.25	28.75
22	-22	26.25	28.75	31.25
24	-24	28.75	31.25	33.75
26	-26	31.25	33.75	36.25
28	-28	33.75	36.25	38.75
30	9890S-30K-TR	36.25	38.75	41.25

仕 様

1. 最大定格電圧電流　：125V, 1A (AC, DC).
2. 使用温度範囲　：-40~+105℃
3. 本製品は、錫系めっきを施しておりますので、ウィスカーが発生する可能性が御座います。その為、ウィスカー発生に対する保障は困難であり、御社にて御判断の上御使用を御願いします。

NOTE

1. MAXIMUM RATING VOLTAGE AND CURRENT : 125V, 1A (AC, DC)
2. TEMPERATURE RANGE : -40~+105℃
3. THIS PRODUCT UTILIZES LEAD-FREE TIN PLATING. ANY PRODUCT WITH LEAD-FREE TIN PLATING IS SUSCEPTIBLE TO TIN WHISKER. IRISO PROVIDES NO ASSURANCES AGAINST THE GROWTH OF TIN WHISKER EVEN UNDER NORMAL OPERATING CONDITIONS. CUSTOMERS ASSUME ALL RESPONSIBILITY FOR ANY PRODUCT FAILURES DUE SOLELY TO THE GROWTH OF TIN WHISKERS.

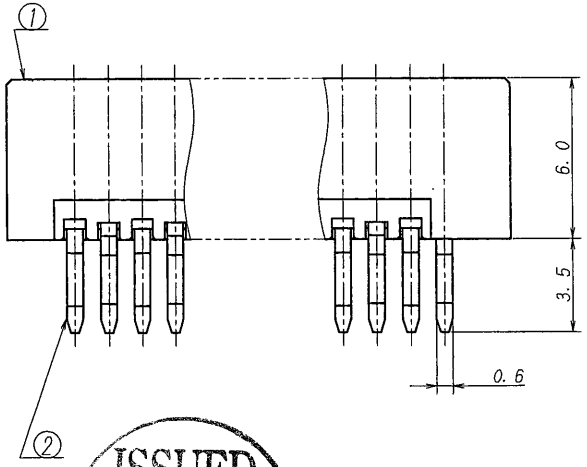

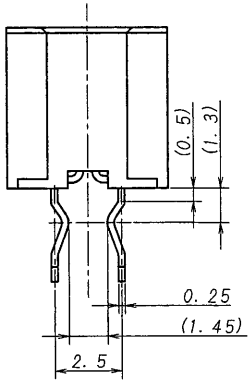

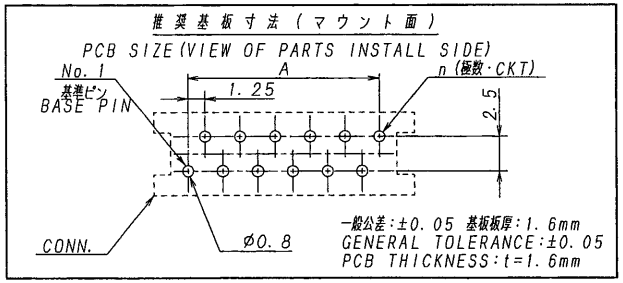

ISSUED
'14.3.-4
IRISO
ENG. DEPT.

LTR 記号	ECN NO	REVISION RECORD 記事	DR	CHK	DATE 年月日
△					
△					
△					
△					
△					
△6	46655	REVISED	Y.K	Jma	3/3'14
△5	36461	REVISED	Y.N	M.T	'10-2-16

MATERIAL 材質
① ハウジング：ガラス入りPA46, 黒色, UL94V-0
HOUSING: GLASS FILLED PA46, COLOR: BLACK, UL94V-0
② 端子/CONTACT：銅合金/COPPER ALLOY

FINISH 仕上げ
スズリフロー後めっき/TIN REFLOW PLATE

GENERAL TOLERANCES 一般公差
DIM 寸法 ± 0.3
ANGLE 角度 ±

3RD. ANG. PROJ. 三角法

SCALE 尺度
UNIT 単位 mm
DR '14-3-3 Y. KOJIMA
DSN '05-5-12 T. Ura
CHK 3/3'14 Jma
APP 3/3 M. Tashiro

IRISO ELECTRONICS CO., LTD.
イリソ電子工業株式会社

TITLE 名称
9890シリーズ ソケット
SERIES 9890 SOCKET

EDP No

PARTS No. 部番 △1 MSA-9890S-**K-TR

DWG No 図番 △1 110-109890-019

REV. 7

DO NOT SCALE DRAWING.
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO IRISO AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. 本図面は、イリソ電子工業㈱の所有する情報を含むもので当社の許可なく複製を禁止する。
REDUSED COPY