極数 CKT	部品番号 PARTS No.	A	B	C	D	NOTE
8	9142S-08Z07-TM1	8.75	10.55	12.50	13.75	
10	-10	11.25	13.05	15.00	16.25	
12	-12	13.75	15.55	17.50	18.75	
14	-14	16.25	18.05	20.00	21.25	
16	-16	18.75	20.55	22.50	23.75	
18	-18	21.25	23.05	25.00	26.25	
20	-20	23.75	25.55	27.50	28.75	
22	-22	26.25	28.05	30.00	31.25	
24	-24	28.75	30.55	32.50	33.75	
26	9142S-26Z07-TM1	31.25	33.05	35.00	36.25	

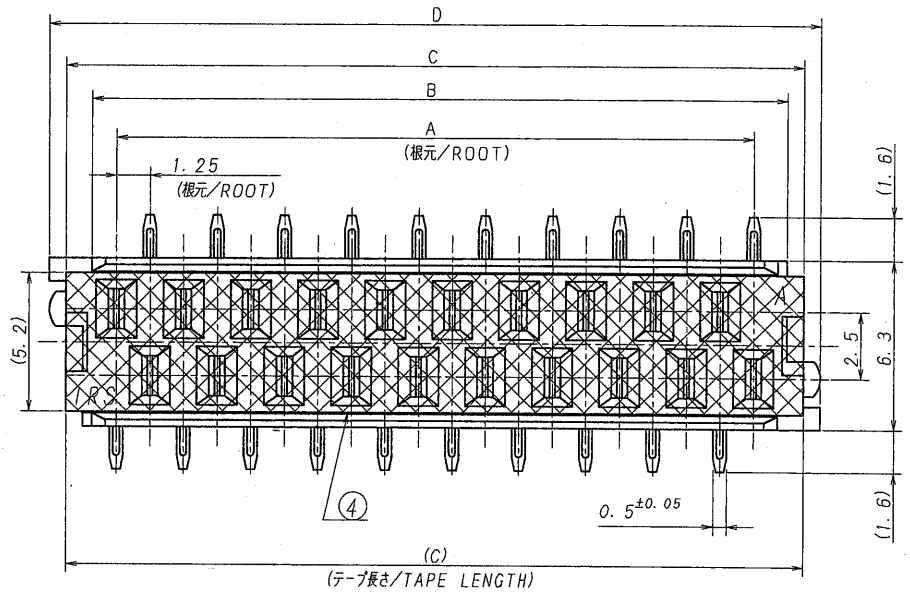

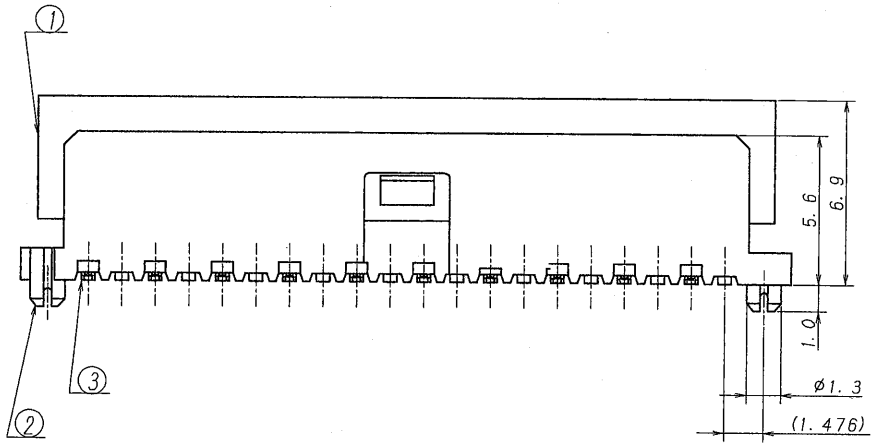

仕 様

1. 最大定格電圧電流 : 125V, 1A (AC, DC)
2. 使用温度範囲 : -40℃~+105℃
3. 材 質
   - ① ハウジング：ガラス入り46ナイロン樹脂，自然色
   - ② リテーナー：ガラス入り46ナイロン樹脂，自然色
   - ③ 端 子 ：リン青銅
   - ④ 吸着テープ：ポリイミド粘着テープ
4. 仕上げ : 半光沢錫めっき 3~6μm. /ニッケル下地 0.5~2μm

NOTE

1. MAXMUM RATING VOLTAGE AND CURRENT: 125V, 1A (AC, DC)
2. TEMPERATURE RANGE : -40℃~+105℃
3. MATERIAL
   - ① HOUSINNG : GLASS FILLED 46NYLON COLOR:NATURAL
   - ② RETAINER : GLASS FILLED 46NYLON COLOR:NATURAL
   - ③ CONTACT : PHOSPHOR BRONZE
   - ④ TAPE : POLYIMID TAPE
4. FINSIH : TIN MATT PLATE 3~6μm
   : OVER NICKEL PLATE 0.5~2μm

ISSUED '08.10.20 IRISO ENG. DEPT.

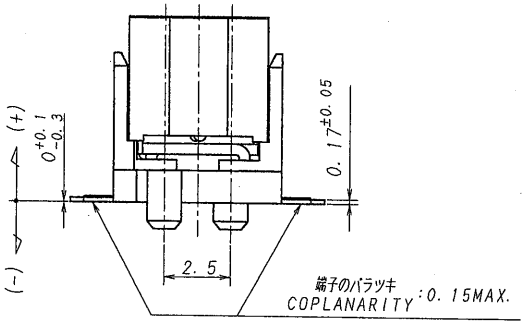

推奨基板寸法 (RECOMMENDED HOLE SIZE OF PCB)

コネクタ搭載面 (VIEW OF PARTS INSTALL SIZE)

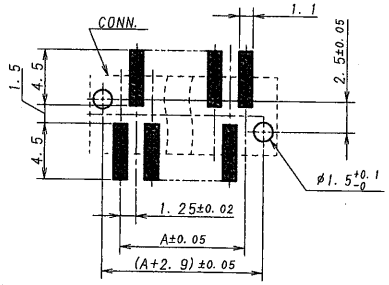

一般公差: ±0.1
GENERAL TOLERANCES: ±0.1

LTR 記号	ECN NO	REVISION RECORD 記	DR	CHK	DATE 年月日
△					
△					
△					
△					
△					
△					
⚠	333947	REVEA SED	S.C	M.T	08-10-16

MATERIAL 材質: 仕様 3参照 SEE NOTE 3

FINISH 仕上げ: 仕様 4参照 SEE NOTE 4

GENERAL TOLERANCES 一般公差: DIM 寸法 ± 0.3, ANGLE 角度 ±

3RD. ANG. PROJ. 三角法

SCALE 尺度 /

UNIT 単位 mm

DR 08-10-16 Seihi. chin

DSN 99-3-31 W Jhong

CHK 08-10-16 M.TAKAO

APP 08-10-16 Y. Sasaki

IRISO ELECTRONICS CO., LTD.
イリソ電子工業株式会社

TITLE 名称: SEREIS 9142 SOCKET
9142 シリーズ ソケット

EDP No

PARTS No 部番: 9142S-**Z07-TM1

DWG No 図番: IMSA-9142S-**Z07-TM1 . REV. 0

DO NOT SCALE DRAWING.

REDUCED COPY